

Specifications

Model	KD-12A	KD-12B	KD-12C	KD-12R	KD-12D	KD-12O
Detection Principle	Hot wire semiconductor	Catalytic combustion	Thermal conductivity	Non-dispersive infrared	Electrochemical cell	Galvanic cell
Gas Detected	Combustible gas, Toxic gas		Hydrogen, Helium, Carbon dioxide	Methane, Carbon dioxide	Carbon monoxide, Hydrogen sulfide	Oxygen
Sampling Method	Diffusion					
Detection Range	As per specifications				0-100ppm, 0-150ppm, or 0-250ppm*1	0-25.0vol%
Alarm Set Value	As per specifications				FS100ppm: 25ppm (recommendation) FS150/250ppm: 50ppm (recommendation)	10ppm 18.0vol%
Alarm Accuracy	Combustible gas: ±25% of alarm set value Toxic gas: ±30% of alarm set value		±25% of alarm set value		±30% of alarm set value	±1.0vol% of alarm set value
Alarm Delay	Combustible gas: within 30s at 1.6 times of alarm set value Toxic gas: within 60s at 1.6 times of alarm set value		Within 30s at 1.6 times of alarm set value		Within 60 s at 1.6 times of alarm set value	Within 5s to reach 18vol% under condition of 10vol%*2
Alarms	Gas alarm: Red LED lamp flashes Trouble alarm: Yellow LED lamp flashes (sensor trouble, power voltage malfunction, etc.)					
Display	4-digit digital LED display					
Output	Gas concentration analog signal •4-20mAADC (common to the negative side of power supply) Gas alarm contact (one stage only)*3 •1a no-voltage contact output, Non-latching •Rated load: 0.5A at 250VAC or 0.5A at 30VDC (resistance load)					
Operation	At 4 points of magnetic switches					
Approvals	II 2 G Ex db IIC T5 Gb (ATEX) Ex db IIC T5 Gb (IECEX) Ex d IIC T5 (Japan EX)					
Degree of Protection	IP65					
Applicable Cable	Cable out diameter: ø10-13 mm 5-conductor cable*3: CVV-S 1.25mm ² , 3-conductor cable: CVV-S 2mm ² or 1.25mm ²					
Operating Temperature/Humidity**	Temperature: -10 to +50°C Humidity: 10% to 90% RH (0 to +50°C)		Temperature: -10 to +40°C Humidity: 30% to 85% RH		Temp: 0 to +40°C Hum: 30% to 85% RH	
Power Supply	24 VDC (±20%)					
Power Consumption	3W max.		2.2 W max.		1.2 W max.	
Dimensions	W158xH116xD68 mm (excluding protrusion)*5		W158xH120xD68mm (excluding protrusion)*6			
Weight	Approx. 1.2kg		Approx. 1.3kg			

Model	KD-12B-SIL	KD-12AH	KD-12BH
Detection Principle	Catalytic combustion	Hot wire semiconductor	Catalytic combustion
Gas Detected	Combustible gas, Toxic gas		Combustible gas
Sampling Method	Diffusion		
Detection Range	As per specifications		
Alarm Set Value	As per specifications		
Alarm Accuracy	Combustible gas: ±25% of alarm set value Toxic gas: ±30% of alarm set value		±25% of alarm set value
Alarm Delay	Combustible gas: within 30s at 1.6 times of alarm set value Toxic gas: within 60s at 1.6 times of alarm set value		Within 30s at 1.6 times of alarm set value
Alarms	Gas alarm: Red LED lamp flashes Trouble alarm: Yellow LED lamp flashes (sensor trouble, power voltage malfunction, etc.)		
Display	4-digit digital LED display		
Output	Gas concentration analog signal •4-20mAADC (common to the negative side of power supply) Gas alarm contact (one stage only)*3 •1a no-voltage contact output, Non-latching •Rated load: 0.5A at 250VAC or 0.5A at 30VDC (resistance load)		Gas concentration analog signal and HART signal •4-20mAADC (common negative with power supply) •Wired HART signal (superimposed over 4-20mA signal), Protocol Rev. 7.5 Gas alarm contact (one stage only)*3 •1a non-voltage, Latching (standard) or non-latching •HART Communication Protocol Rev. 7.5
Display	4-digit digital LED display		
Operation	At 4 points of magnetic switches		
Approvals	II 2 G Ex db IIC T5 Gb (ATEX) Ex db IIC T5 Gb (IECEX) Ex d IIC T5 (Japan EX) II 2 G Ex db IIC T5 Gb (ATEX) Ex db IIC T5 Gb (IECEX)		
Degree of Protection	IP65		
Functional Safety	•SIL2 capable •Hardware Fault Tolerance: zero (0) •Applicable standards: IEC 61508-2, EN 61508-2 and JIS C 0508-2.		
Applicable Cable	Cable out diameter: ø10-13mm 5-conductor cable*3: CVV-S 1.25mm ² , 3-conductor cable: CVV-S 2mm ² or 1.25mm ²		
Operating Temperature/Humidity**	-10 to +50°C 10 to 90%RH (0 to +50°C)		
Power Supply	24 VDC (±20%)		
Power Consumption	3W max.		
Dimensions	W158xH116xD68 mm (excluding protrusion)*5		W127xH116xD68mm (excluding protrusion)
Weight	Approx. 1.2kg		

*1. Specify when purchasing *2. Under the condition of 20 ±2°C *3. Screwless type only *4. No radical temperature or humidity changes and no condensation *5 W127xH116xD68mm for ATEX certified models *6 W127xH120xD68mm for ATEX certified models



NEW COSMOS ELECTRIC CO., LTD.

Offices

Head Office (Osaka, Japan)
2-5-4 Mitsuyana, Yodogawa-ku, Osaka, Japan 5320036
Phone: +81-6-6885-8484
E-mail: e-info@new-cosmos.co.jp

Thailand Office
4345 Bhiraj Tower at BITEC, 23rd Floor, Sukhumvit Rd., South Bangna, Bangna, Bangkok 10260 Thailand
Phone: +66-2-017-5175
E-mail: info.cosmosthailand@new-cosmos.co.th

Paris Office
128 Rue Du Faubourg Saint-Honore, 75008 Paris, France
Phone: +33 6-62-93-51-53
E-mail: info@new-cosmos.fr

Group Companies

NEW COSMOS ELECTRIC (SHANGHAI) CO., LTD.
4th Plant No.385, Dongxing Road, Songjiang Industrial Zone, Shanghai, China 201613
Phone: +86-21-6774-3138
E-mail: info@new-cosmos.com.cn

NEW COSMOS ELECTRIC KOREA CO., LTD.
3F,4F BMY Tower, 16, Teheran-ro 27-gil, Gangnam-gu, Seoul, Korea
Phone: +82-2-555-3102
E-mail: info@new-cosmos.co.kr

TAIWAN NEW COSMOS ELECTRIC CO., LTD
10F-3, No. 93, Shuiyuan St., East Dist., Hsinchu City 300042, Taiwan
Phone: +886-3-574-4593
E-mail: cosmost1@ms75.hinet.net


New Cosmos USA, Inc.
650 Warrenville Road, Suite 101, Lisle, IL 60532, USA
Phone: +1-847-749-3064
E-mail: support@newcosmosusa.com

New Cosmos-BIE (Netherlands)
Maxwellstraat 7, NL-1704 SG, Heerhugowaard, the Netherlands
Phone: +31-72-576-5630
E-mail: sales@newcosmos-europe.com

Be sure, be safe.

DIFFUSION TYPE GAS DETECTOR HEAD with DISPLAY
KD-12 SERIES

Explosion proof
Fixed gas detector with display
for combustible gases, toxic gases, oxygen etc.

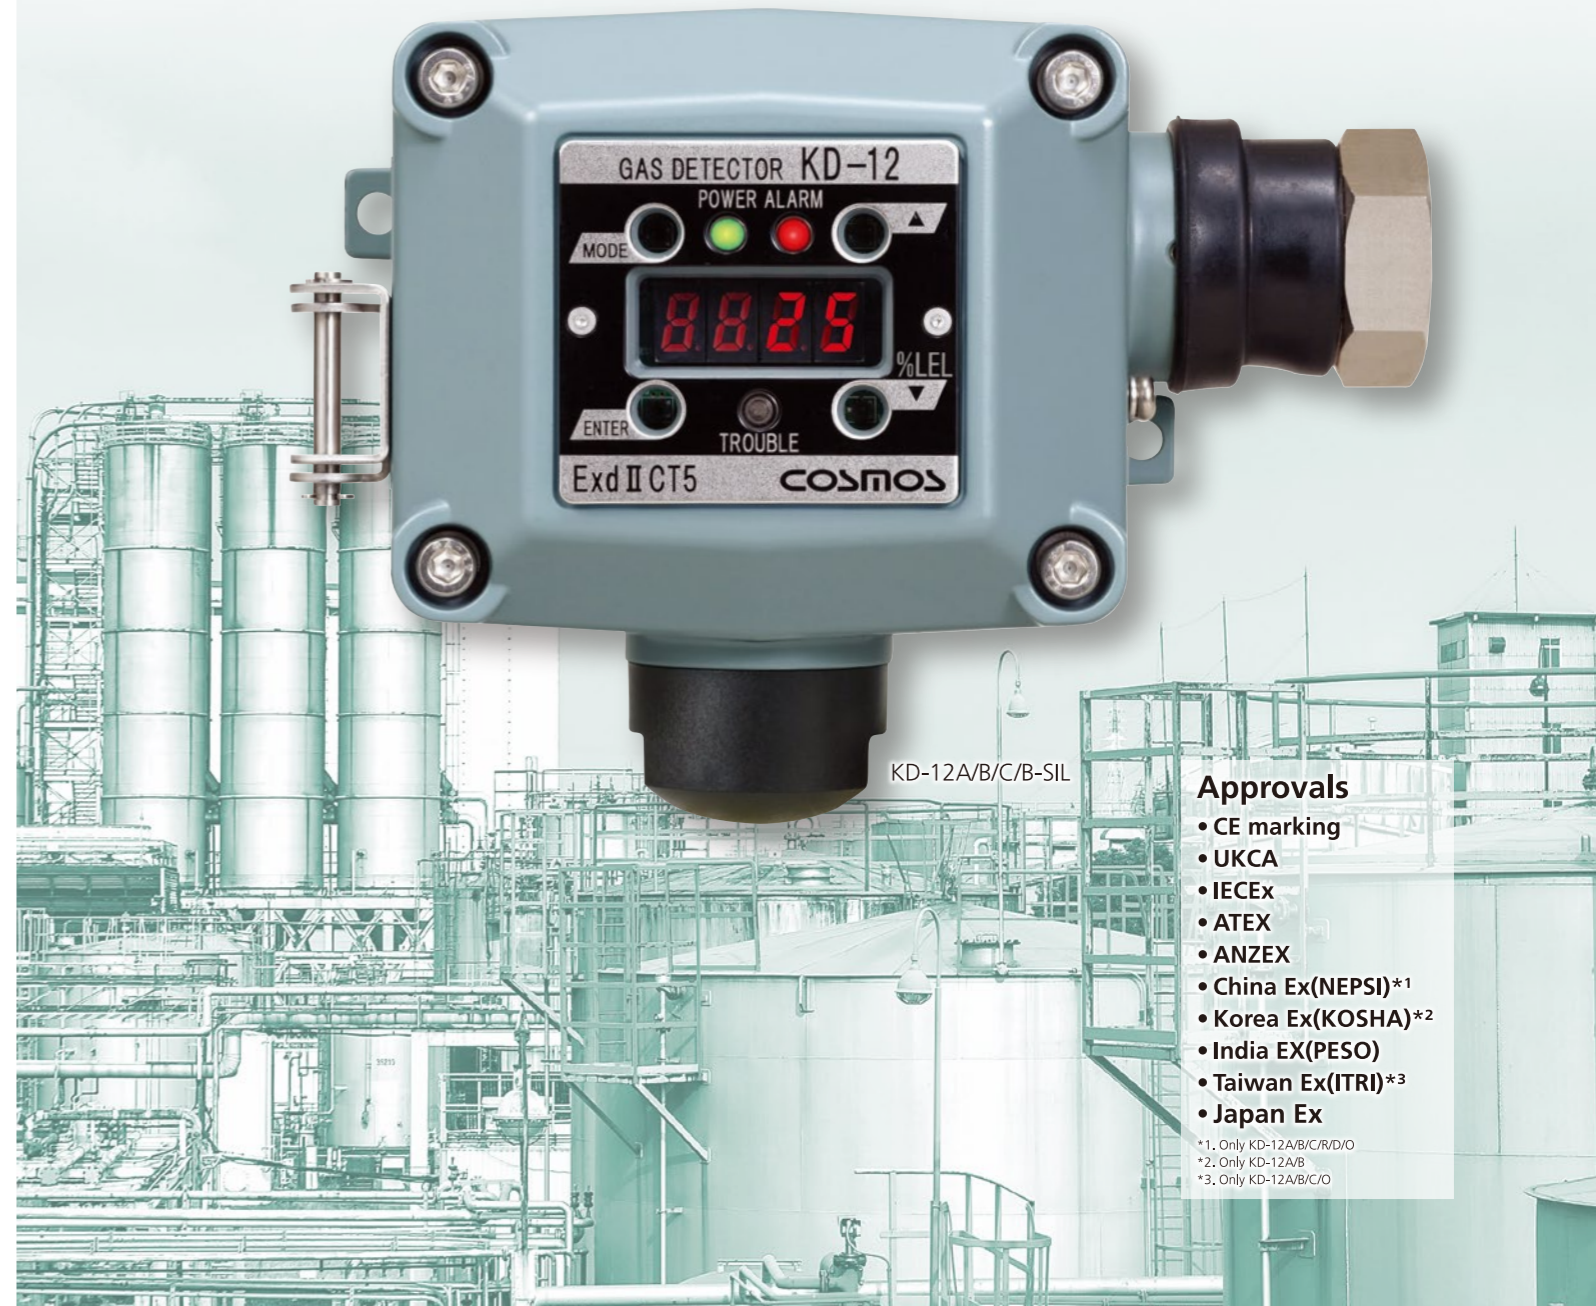

KD-12A/B/C/B-SIL

Approvals

- CE marking
- UKCA
- IECEx
- ATEX
- ANZEX
- China Ex(NEPSI)*1
- Korea Ex(KOSHA)*2
- India EX(PESO)
- Taiwan Ex(ITRI)*3
- Japan Ex

*1. Only KD-12A/B/C/R/D/O
*2. Only KD-12A/B
*3. Only KD-12A/B/C/O



SAFETY WARNING

Carefully read the instruction manual prior to use.
Select and use the device designed to detect the required type of gas. Use of a wrong sensor type may cause an accident.

Explosion proof KD-12 Series (IP65) is smart and reliable fixed gas detectors for continuous monitoring of a wide range of combustible gases, toxic gases, oxygen and more. You can choose from various models such as HART communication model and SIL2 certified model according to the applications.

Feature

• **Rugged, compact and lightweight**

Size 158xH116xD68mm, Weight Approx. 1.2kg

• **LED local display**

Large LED local display shows the gas concentration and alarm indication.

• **Explosion proof**

ATEX, IECEx and TIIS approved.

• **Water and dust proof**

IP65 rating

• **One man calibration**

All setup and maintenance can be performed easily on site by one person with a magnetic stick (pic.1).

• **Easy sensor replacement**

The simple plug-in sensor module makes it easier (pic2).



pic.1



pic.2

• **Japan made products**

As well as the sensor which is the heart of gas alarm, all the products are developed and manufactured in Japan with high quality and reliability.

• **Infrared sensor for long-term stability and less calibration needs**

(KD-12R)

• **HART communication model is available**

(KD-12AH/KD-12BH)

• **SIL2 certified model is available**

(KD-12B-SIL)

• **Extractive type (PD-12 series) is available***


* For further information, please contact us.

Configurations

With buzzer or rotating beacon light

It is used as an integral type gas detection system, connecting to external buzzer or rotating beacon light (screw-less type only).

With external buzzer / rotating beacon light



Desktop type




*Non-explosion-proof

With indicator unit


It is connected with our indicator units and you can monitor gas concentrations and alarm status from a distance.

One-point type



NV-100M

Multi-point type




V3M Type

UV-810


With DCS/PLC/SCADA

It is directly connected to a central control system such as DCS/PLC/SCADA. It is also mounted in vehicles like tank lorry etc.


With DCS/PLC etc.



For tank lorry etc.



KD-12

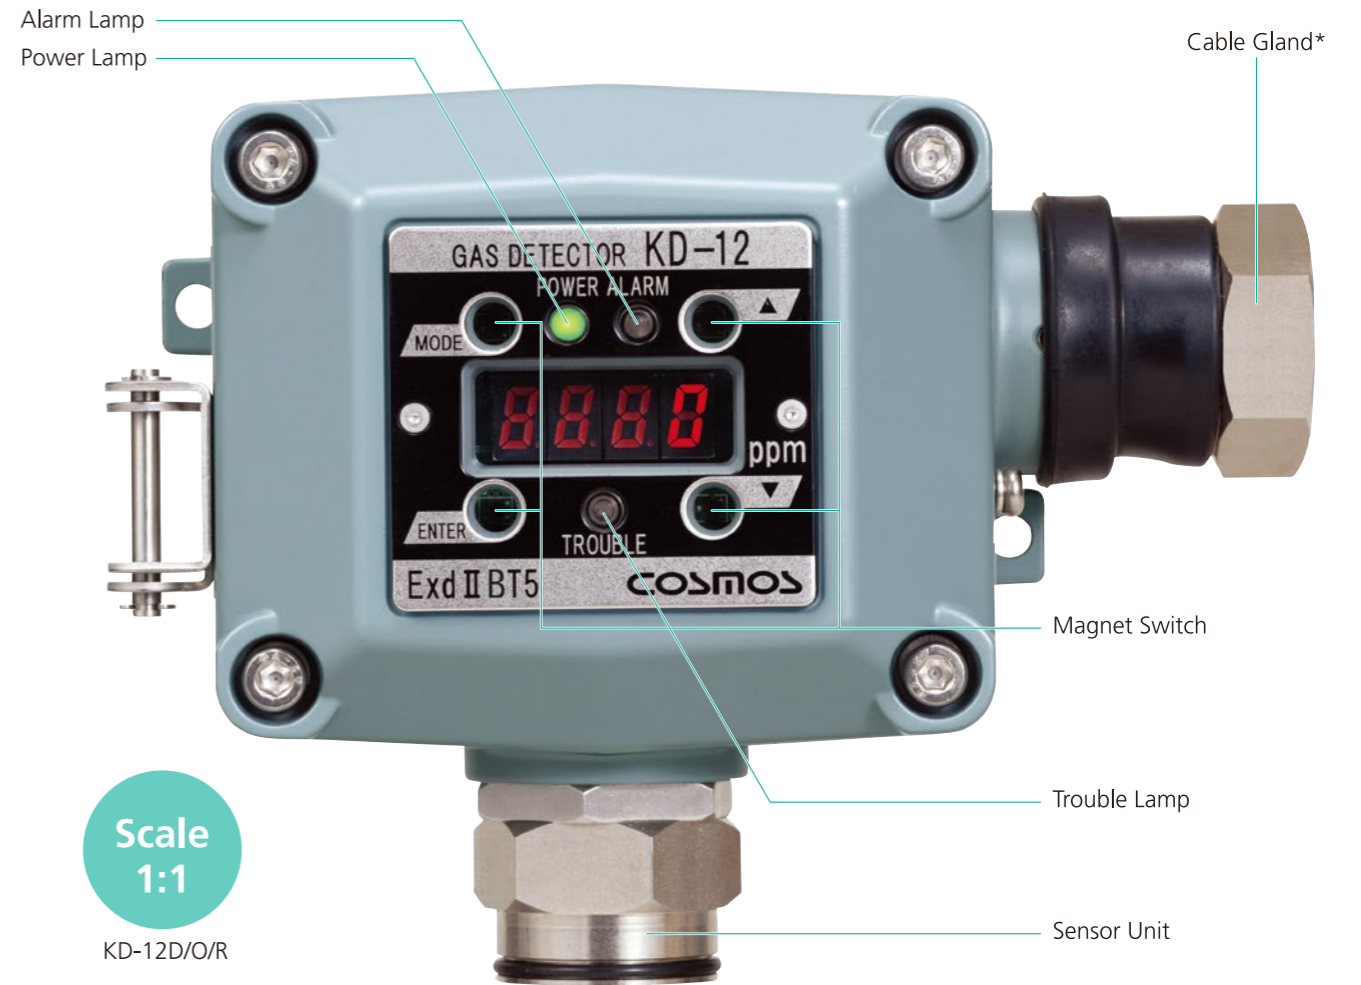

Scale 1:1


KD-12D/O/R

* Cable gland is not included in ATEX certified models and sold separately.

Applications


- Pipelines
- Tank farms
- Exploration and drilling platforms
- Production platforms
- Oil and gas terminals
- Refineries and chemical plants
- Power Stations
- Waste water facilities
- Utilities

External Dimensions

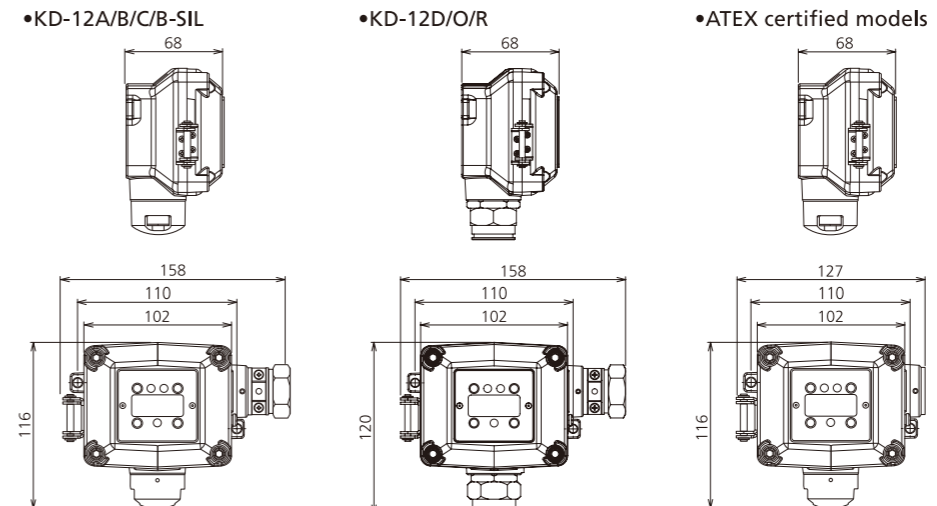

Terminal Block

• **Screw-less Type**



• **Terminal Block Type**

